

## 5BB PERC MONOCRYSTALLINE MODULE 72 Cells 375W-380W -385W

We represent the leading figure in the field of renewable energy in the local market and constantly expanding on the african, asian and european continents.

With two production units in Tunisia relying on German technology and processes for modules production We are in a constant challenge to keep up with the demand of the market by an R&D team who is willing to respond to all existing trends in the solar technology sector.

*"Solar power is going to be absolutely essential to meeting growing energy demands while staving off climate change."*

Ramez Naam

### Key Features



Excellent Low Light Performance



Positive Power Tolerance Guaranteed (0-5Wp)



Maximum 5400 Pa Snow Load



Maximum 2400 Pa Wind Load



PID Resistant




Outstanding Weather Resistance



10 Years Manufacturer's Warranty

### Warranty Graphic

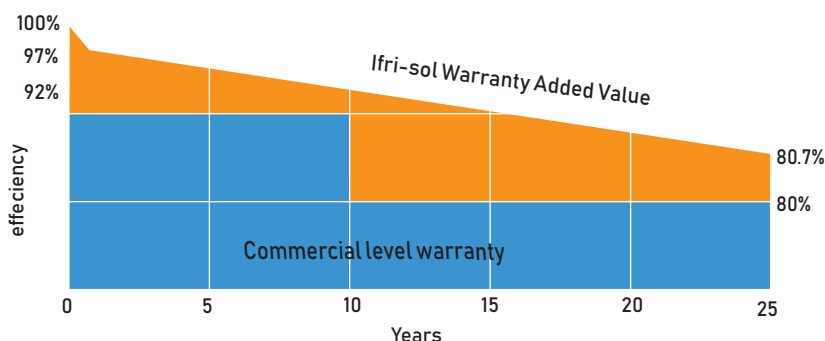

### Comprehensive Certificates

-IEC 61215 , IEC 61730 :2016

-ISO 9001 :2015 Quality Management Systems

-ISO 14001 : 2015 Environmental Management Systems

-OHSAS 18001 : 2007 Occupational Health and Safety Management Systems

-BS OHAS 18001 : 2007 design manufacturing and sales of photovoltaic Modules

-UL 1703 Certified Product

### High Linear Performance Guarantee

10 year Manufacturer Guarantee on 92% of the Nominal performance

25 year Manufacturer Guarantee on 80.7% of the Nominal performance



www.ifrisol.solar

All Rights are Reserved to Ifri-sol



contact@ifrisol.solar



+216 29 533 333 / +216 73 381 853



+216 73 381 854



ifrisol



ifrisol




Ifrisol1


This product was designed and manufactured by Ifrisol Corp. in the Republic Tunisia and have been certified by the renowned German labs and facilities.



Current-Voltage/Power-Voltage Curves, IF-M375-72

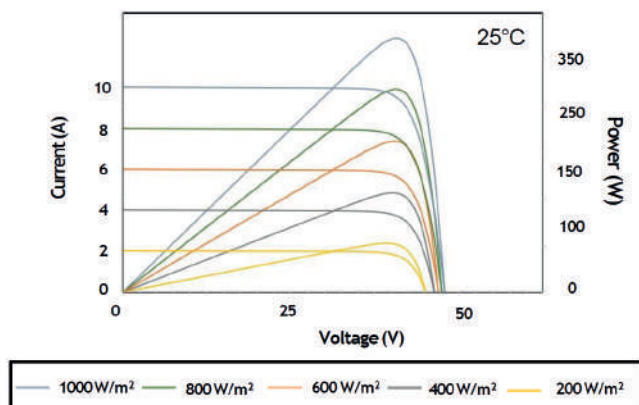

## Technical Drawings

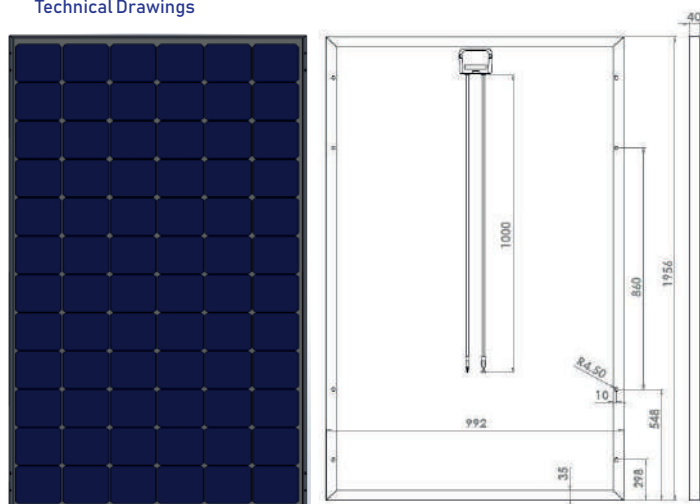

## Electrical Specification

Module Type	Nominal Power P <sub>mp</sub>	Nominal Voltage U <sub>mp</sub>	Nominal Current I <sub>mp</sub>	Open Circuit Voltage U <sub>oc</sub>	Short Circuit Current I <sub>sc</sub>	Module Conversion Efficiency
IF-M375-72	375 Wp	39.74 V	9.44 A	48.45 V	9.98 A	19.32 %
IF-M380-72	380 Wp	40.02 V	9.49 A	48.70 V	10.03 A	19.58 %
IF-M385-72	385 wp	40.31 V	9.55 A	48.98 V	10.10 A	19.84 %

Electrical Data at STC (STANDARD TEST CONDITIONS): 1000W/m² Irradiance, 25°C Cell Temperature, AM1.5g Spectrum According to EN 60904-3,

## NMOT

Module Type	Nominal Power P <sub>mp</sub>	Nominal Voltage U <sub>mp</sub>	Nominal Current I <sub>mp</sub>	Open Circuit Voltage U <sub>oc</sub>	Short Circuit Current I <sub>sc</sub>
IF-M375-72	276.16 Wp	36.76 V	7.50A	44.80 V	7.90 A
IF-M380-72	279.47 Wp	36.99 V	7.55A	45.10 V	7.95 A
IF-M385-72	283.12 Wp	37.23 V	7.59A	45.37 V	8.02 A

Electrical Data at NMOT: 800W/m² Irradiance, 20°C Ambient Temperature, 1m/s Power Measurement Tolerance: +/-3%,

## Design

Front Glass	3.2mm High Transmittance and White Glass
Encapsulant	Ethylene Vinyl Acetate (E.V.A)
Cell	5BB Monocrystalline High Efficiency/72pcs
Backside	Composite Film(white, black,...)
Frame	40mm Anodized Aluminum (Silver/Black)

## Mechanical Specification

Dimensions (H x W x D)	1956mm x 992mm x 40mm
Weight	23Kg

## Power Connection

Junction Box	IP67 Junction Box with 3 Bypass Diodes(clamping//soldering)
Cable Solar Cable	Length (1000//1200) mm , 4mm² Prefabricated with MC4-Combined Plug
Application Class	Class II (according to IEC61730)

## Limit Values

Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	16A
Limiting Reverse Current	16A
NMOT	45±2°C
Operating Temperature	From -40°C to 85°C
Maximum Load	2400N/m²

## Temperature Coefficients

Voltage U <sub>oc</sub>	-0.30%/°C
Current I <sub>sc</sub>	+0.06%/°C
Output Power	-0.38%/°C

## Packaging Specifications

Dimensions (HxWxD)	1980mm x 1120mm x 1160mm
Module Quantity per carton	27
Module Qty per carton 20 in	270
Module per container 40 in HC	649

Caution: Technical data are subject to change without any notice, errors expected